

Smartlock | SL-1

Innovations in
cargo securing



- Full automatic locking and unlocking by smart shape
 - **Function Follows Form**
- Less Port-Time by immediate start of discharging / container operation
- Weight optimized robust One-Piece design
 - **One Piece Design**
 - Fast and easy handling
 - No movable parts
 - No spare parts
 - No maintenance
 - No greasing
- Corrosion protection by fully Hot-Dip-Galvanizing
- 10 years functional guarantee
- Optimal use in ISO Gap because no parts juts out of the length or breadth of the container
- Consistent Lock-Clearance in accordance with ISO 3874 / ISO 1161 and class requirement for safe container securing arrangement at each container tier.
- Minimum tension breaking load 500 kN
- Minimum shear breaking load 420 kN
- Minimum compression breaking load 2000 kN
- Optimized weight less than 5 kg
- International Patented



Coning



Certified by:




In compliance with
LR Rules for Classification
of Ships, Part 3, Ch 14



Original is best

Smartlock | SL-1

Location within a Securing System

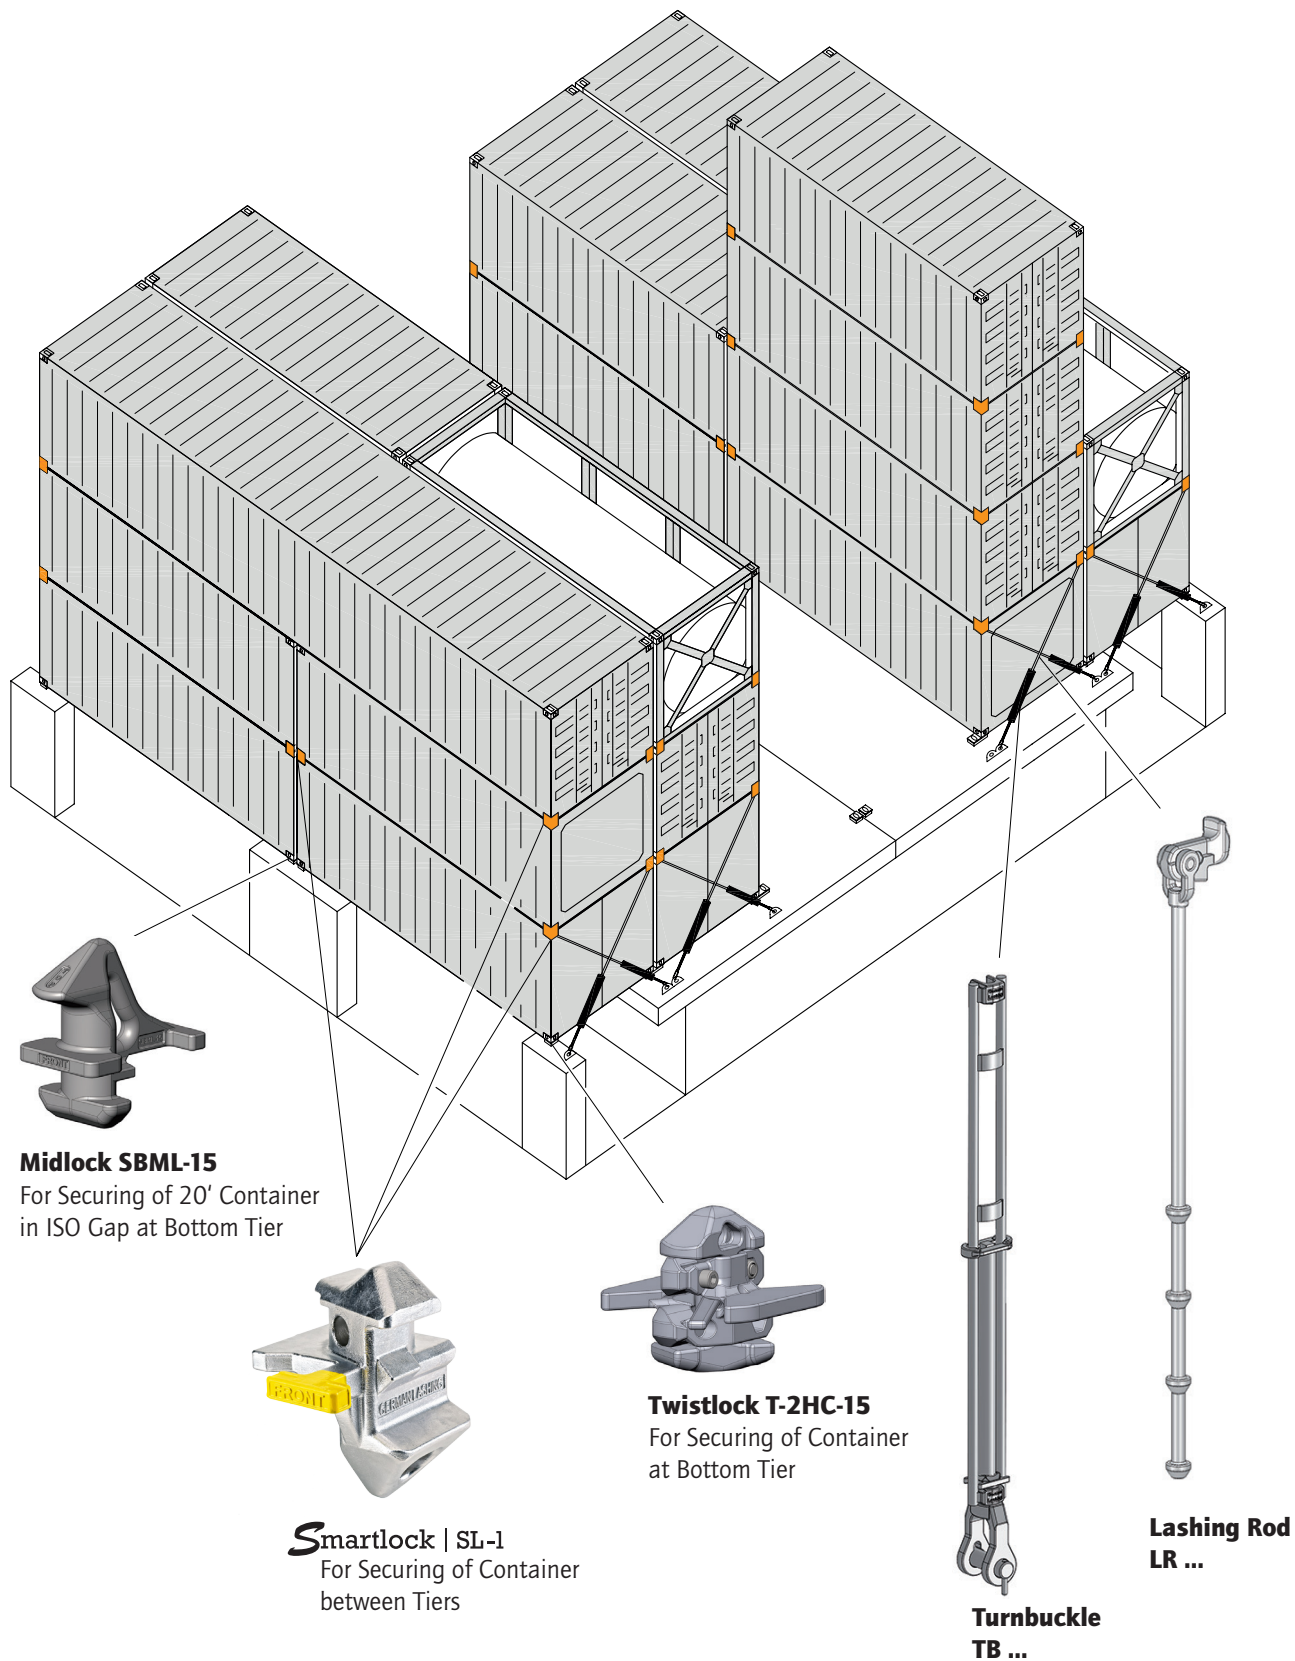

Original is best